



UT447E Top Spud Urinal
TEU1LN12#CP 0.5GPF Eco EFV



UT447EV Back Spud Urinal
TEU2LN11#SS 0.5GPF Eco EFV
(flush valve will launch second half of 2008)

- Low consumption 0.5 gallon per flush
- Compact design with privacy shields
- 14" elongated rim for all handicap applications
- Washout flush action

Vitreous china low consumption washout urinal. Includes wall hangers, 3/4" inlet spud, 2" I.P.S. outlet flange and rubber gasket. ADA Compliant.

■ **UT447E**

Low consumption washout urinal
Top Spud Inlet

■ **UT447EV**

Low consumption washout urinal
Back Spud Inlet

Colors:

Standard #01 Cotton

Optional See price book for additional colors

Recommended flushometer valve:

TOTO Electronic Flush Valves are highly recommended for maximum performance.




UT447E / UT447EV

Low Consumption Washout Urinal

■ SPECIFICATIONS

Water Use: 0.5 Gpf
 Flush System: Washout flush action
 Warranty: One Year Limited Warranty
 Material: Vitreous china
 Min. Water Pressure: 15psi (flowing)
 Height (Urinal Only): 27³/₁₆"
 Width: 18"
 Rim: 14"
 Shipping Weight: **UT447E / UT447EV**
 66 lbs.

Shipping Dimensions: **UT447E / UT447EV**
 29⁷/₈"L x 16³/₄"W
 x 19¹/₈"H

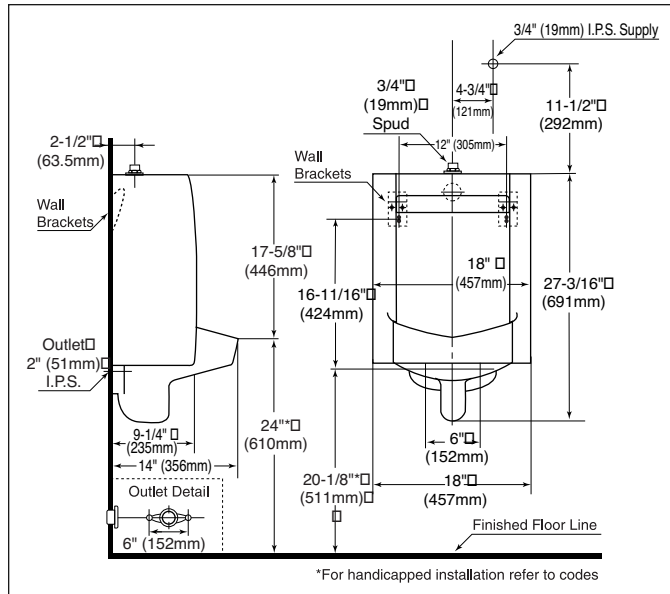

*For handicapped installation refer to codes

UT447E

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/c-UPC, CSA, City of Los Angeles, State of Massachusetts, and others.




Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of rim is 17" maximum from the finished floor.

Note: Refer to manufacturer's instructions and local codes for proper flushometer valve installation and requirements

Recommended carrier:
 Jay R. Smith 0636 (Wall Hanger)
 0637 (Wall Hanger with bottom)

These dimensions and specifications are subject to change without notice.

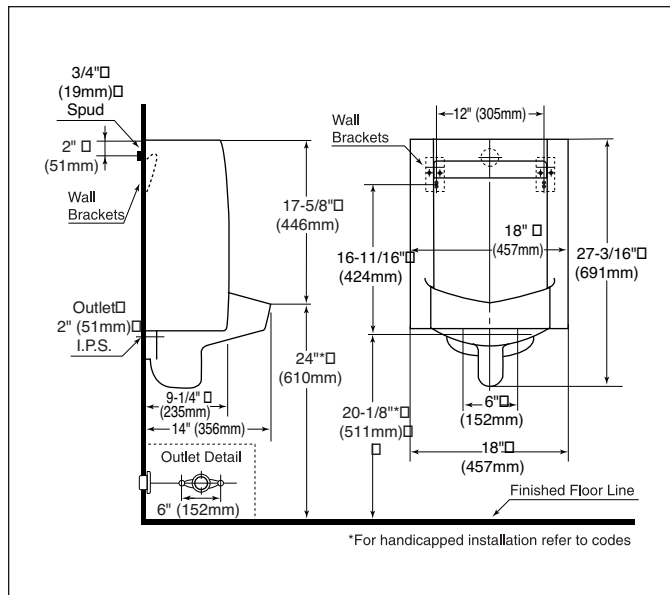

*For handicapped installation refer to codes

UT447EV

TOTO®