



# Z5738.205.00

## “Small Pint” 1/8 gpf, Battery Powered Ultra Low Consumption Urinal System

TAG \_\_\_\_\_



### Z5738 Series

- Zurn One ultra low consumption urinal system designed for optimal performance between Zurn fixture and Zurn flush valve to save water while exceeding industry performance standards.
- 1/8 gallons per flush [0.5 Liters per flush]
- Vitreous china
- High efficiency washout flushing action
- Over 85% water savings over standard 1.0 gpf [4.0 Lpf] system
- Pressure compensating internal flow regulator
- 3/4" top spud
- 2" I.P.S. outlet flange and rubber gasket with integral trap
- 14" extended rim for handicap compliance when installed at proper height
- Assembled with vandal resistant outlet strainer
- Shipping weight: 39 lbs.

### ENGINEERING SPECIFICATION:

**Z5738.205.00 EcoVantage® Battery Powered Ultra Low Consumption Urinal System-** System comes complete with sensor operated, battery powered exposed ZEG6003EV high efficiency flushometer valve and vitreous china urinal. The system is designed to perform to industry standards with as little as 1/8th gallon per flush. Valve is operated by an infrared convergence-type proximity sensor with smart technology, powered by 4 "AA" batteries, furnished with vandal resistant chrome plated metal housing, chloramine resistant internal seals, and reversible cover. Valve features an internal flow regulator to maintain constant flow rates independent of line pressures and an in-line filter to protect the valve from debris within the water. Complete with high pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. Vitreous china urinal is supplied with 3/4" top spud, 2" outlet connection, and vandal resistant outlet strainer.

This space is for Architectural/engineering Approval

Z5738.205.00 (SHOWN ABOVE)

*These dimensions and specifications are subject to change without notice.*

*Fixture dimensions meet ANSI/ASME standards A112.19.2 and CAN/CSA B45 requirements.*

*Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 17" [432 mm] from finished floor.*






# Z5738.205.00

## “Small Pint” 1/8 gpf, Battery Powered Ultra Low Consumption Urinal System TAG \_\_\_\_\_

Rough-in dimensions for Z5738.205.00  
Series

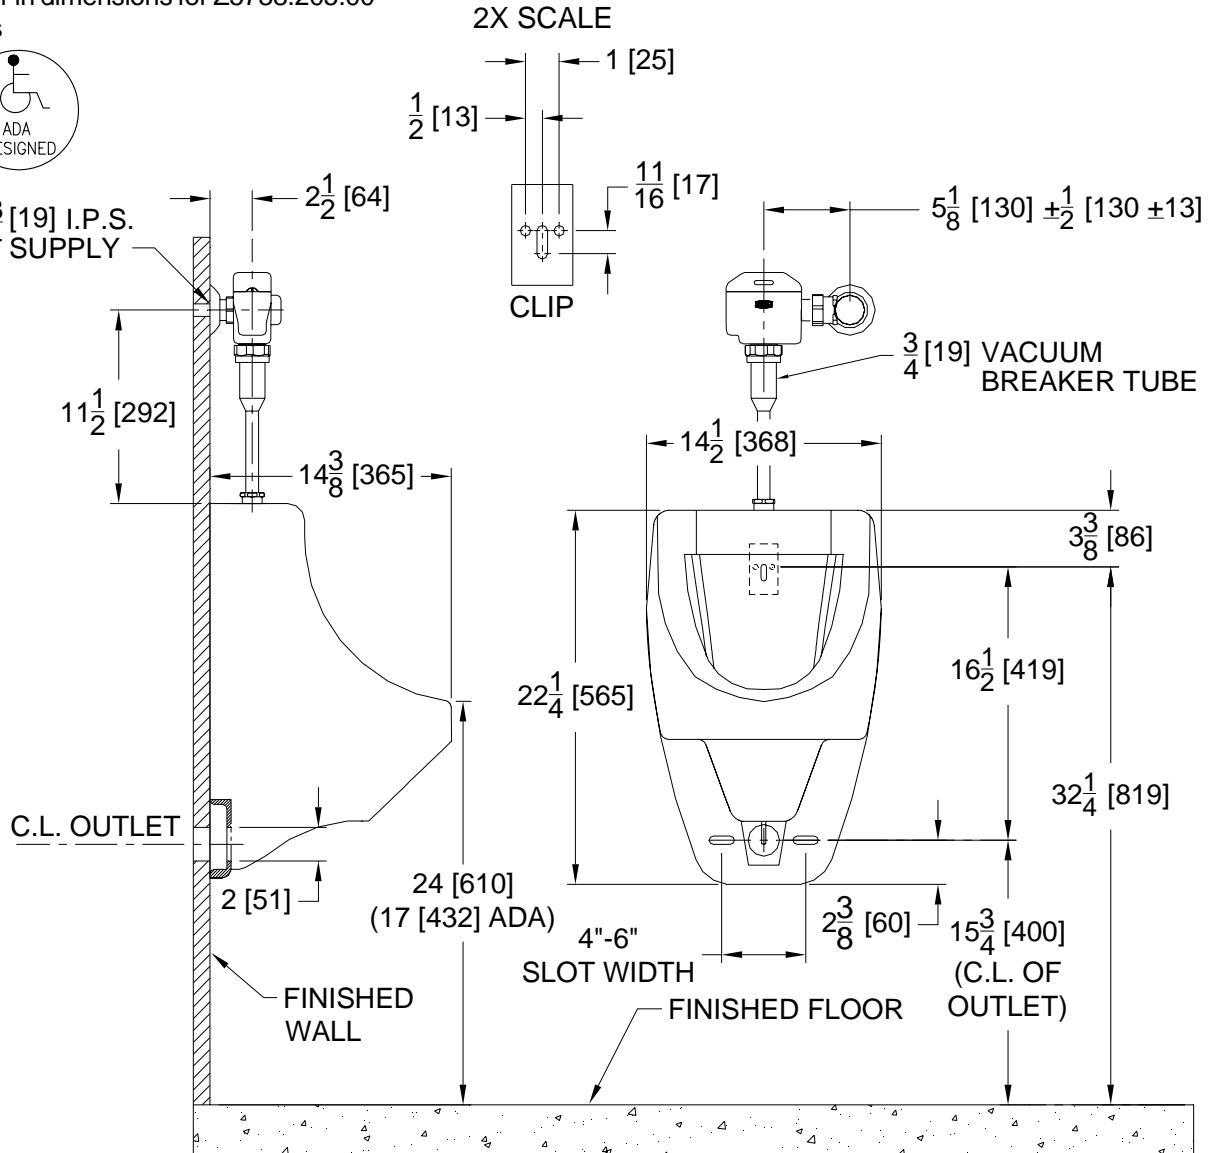

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 432mm (17") from finished floor.



Note: Rough-in for concealed plate carrier, see Zurn Z1222 Rough-in sheet.