



Z5758.205.00

**"The Retrofit Pint", 1/8 gpf Battery Powered
Ultra Low Consumption Urinal System**

TAG _____



Z5758 Series

Z5758 Series - "The Retrofit Pint"

- Zurn One ultra low consumption urinal system designed for optimal performance between Zurn fixture and Zurn flush valve to save water while exceeding industry performance standards
- 1/8 gallons per flush [0.5 Liters per flush]
- Vitreous china
- High efficiency washout flushing action
- Over 85% water savings over standard 1.0 gpf [4.0 Lpf] system
- Pressure compensating internal flow regulator
- Universal Bracket and oversized footprint to make retro-fit easy
- 3/4" top spud
- 2" I.P.S. outlet flange and rubber gasket with integral trap
- 14" extended rim for handicap compliance when installed at proper height
- Vandal resistant outlet strainer included
- Shipping Weight: 72 lbs.

ENGINEERING SPECIFICATION:
Z5758.205.00 EcoVantage® Battery Powered High Efficiency (HEU) Urinal System- System comes complete with sensor operated, battery-powered exposed ZEG6003EV high efficiency flushometer valve, control stop assembly, and vitreous china urinal. The system is designed to perform to industry standards with as little as 1/8th gallon per flush. Valve is operated by an infrared convergence-type proximity sensor with smart technology, powered by 4 "AA" batteries. Valve features an internal flow regulator to maintain constant flow rates independent of line pressures. Vitreous china urinal is supplied with 3/4" top spud, 2" outlet connection, strainer assembly, and universal retrofit hanger bracket.

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standards A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 17" [432 mm] from finished floor.



www.GreenSpec.com






Z5758.205.00

"The Retrofit Pint", 1/8 gpf, Battery Powered
Ultra Low Consumption Urinal System
Rough-In

TAG _____

Rough-in dimensions for Z5758.205.00

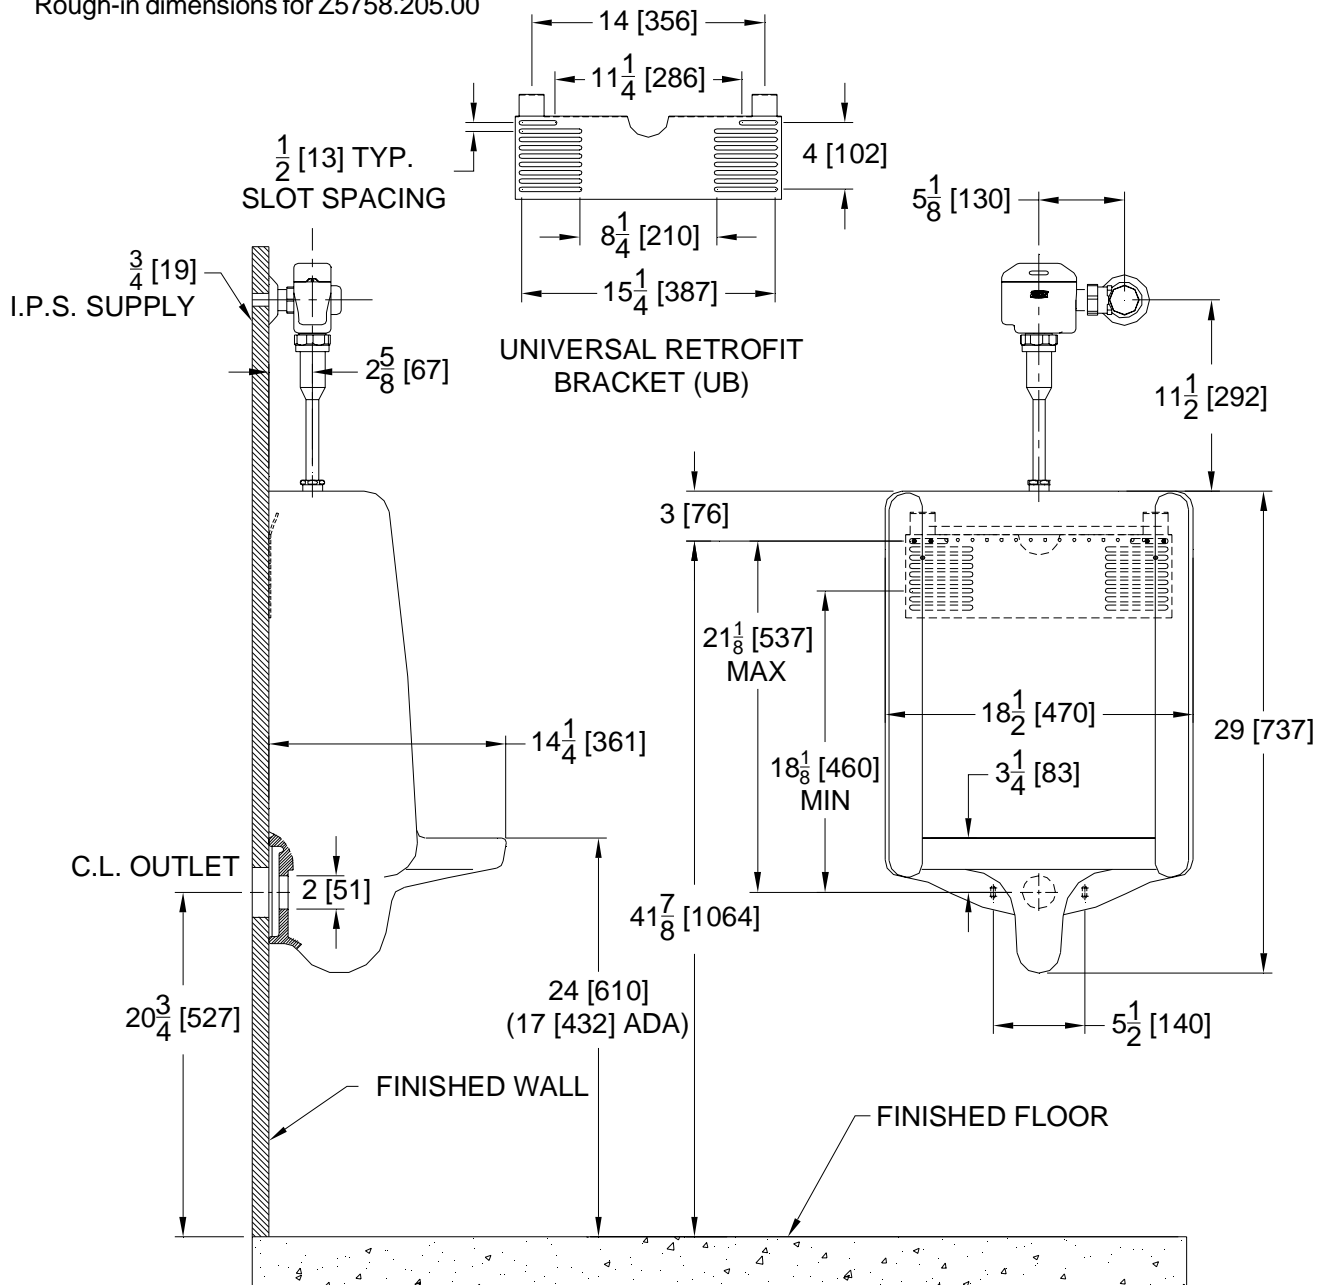

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standards A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when urinal is installed 17" [432 mm] from finished floor.

