



Z5615

1.28 GPF Elongated Wall Hung EcoVantage Flush Valve Toilet System

TAG _____



Z5615 Series Elongated

Suffix Options:

- RF** Retro-Fit Nut Kit for extending carrier studs from existing wall.

Recommended Trim:

- Z5955SS-EL** Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.

Note: To ensure system performance:
Minimum Running Water Pressure = 25 psi.

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



Z5615 HET Series

- Zurn One HET Toilet System designed for optimal performance between Zurn fixture and Zurn flush valve to save water.
- 1.28 gpf (gallons per flush)
- 20% water savings over standard 1.6 gpf system
- Vitreous china
- Elongated front rim
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Zurn product system component compatibility and quality assurance
- Shipping Weight: 40 lbs.

- Engineering Specification: Z5615 AquaSense, EcoVantage High Efficiency Toilet System**
-System comes complete with exposed ZTS6200EV high efficiency flushometer valve and vitreous china wall-hung toilet. The system is designed to perform to industry standards with as little as 1.28 gallons per flush. Valve is operated by an infrared convergence-type proximity sensor with smart technology, powered by a single 9 volt battery, furnished with a vandal resistant chrome plated cast brass valve body, chloramine resistant internal seals, manual over ride button and reversible cover. Complete with high pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit and a cast wall flange with set screw. Vitreous china toilet is 1-1/2" top spud with 2-1/8" fully glazed trapway and siphon jet action. Valve and toilet are an engineered system designed to provide optimal performance and 20% water savings over 1.6 gpf conventional toilets.




Z5615

1.28 GPF Elongated Wall Hung EcoVantage Flush Valve Toilet System TAG _____ Rough-in

Rough-in dimensions for Z5615 Series

- Z5615 with top spud

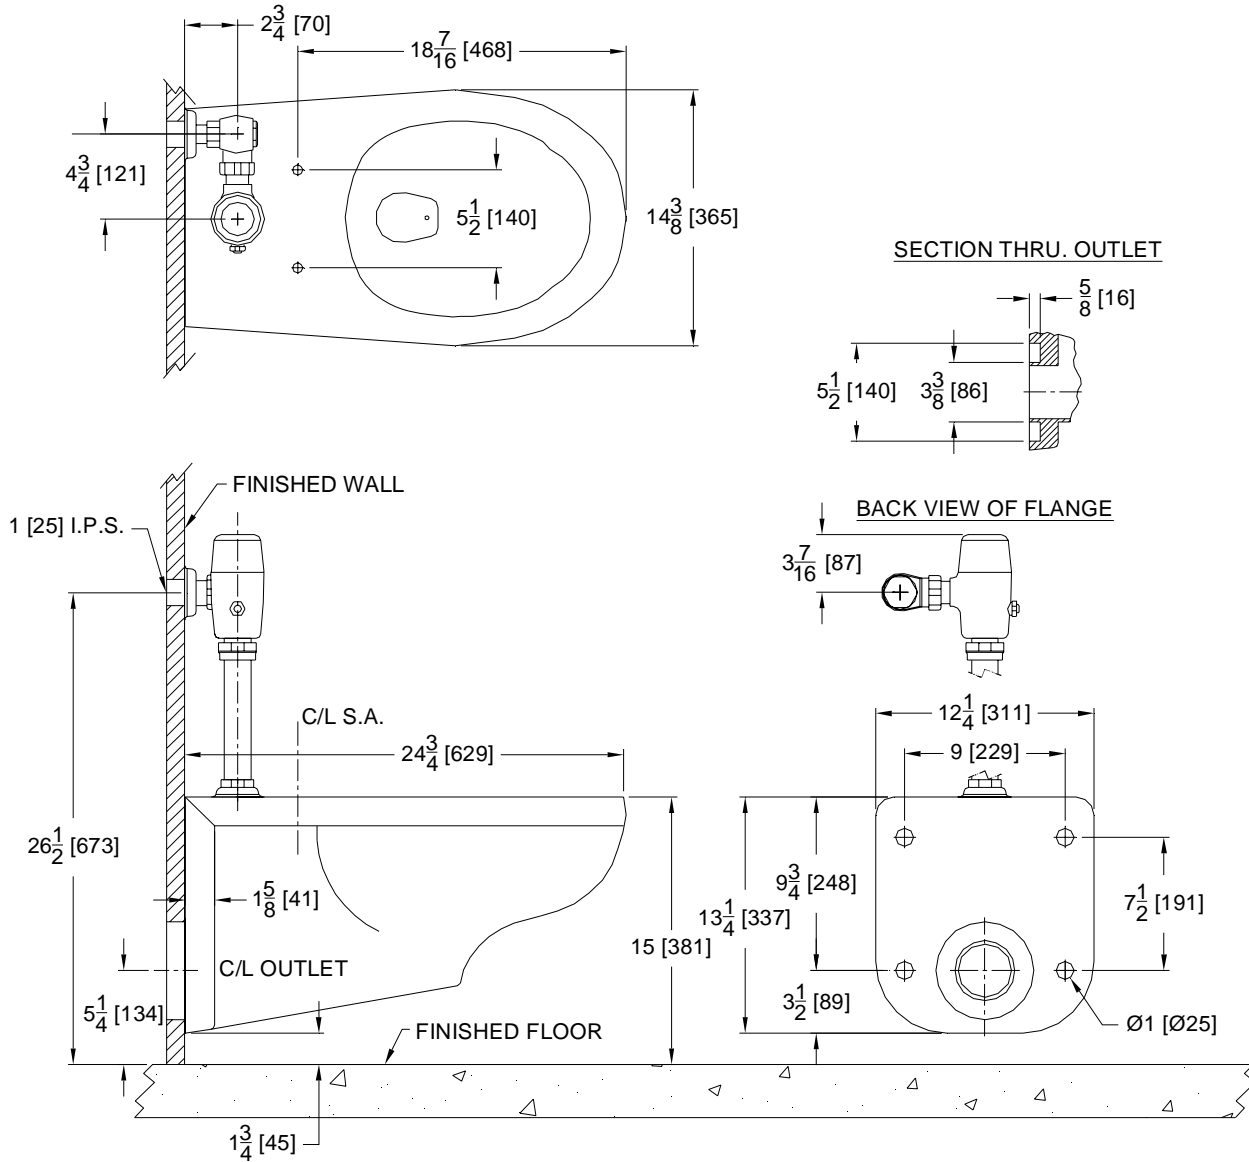

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



Note: For ADA compliance, rim height should be installed 17" from finished floor.